



sliding system


Ecoslide

- a sliding door system without thermal insulation
- system intended for designing elements of architectural exterior and interior enclosures that do not require thermal insulation
- the system can have two, three or four rails to design 2-, 3-, 4-, 6- and 8- leaf installations
- the Ecoslide system is compatible with other systems offered by Aliplast
- there is possibility of use Flyscreen system and Insect System (fly screens are a practical and an extremely functional protection against insects)
- a wide range of colours – RAL palette (Qualicoat 1518), texture colours, Aliplast Wood Colour Effect (wood-like colours), Aliplast Loft View – colours imitating stone surfaces (Qualideco PL-0001), anodised colour (Qualanod 1808), bi-colour


sliding system

technical specification

system	material	depth of frame	depth of leaf	glazing range	weight of leaf	type of doors
ES	aluminium/polyamid	54-106,5 mm	18,5-21,5 mm	4-12 mm	to 40 kg	sliding

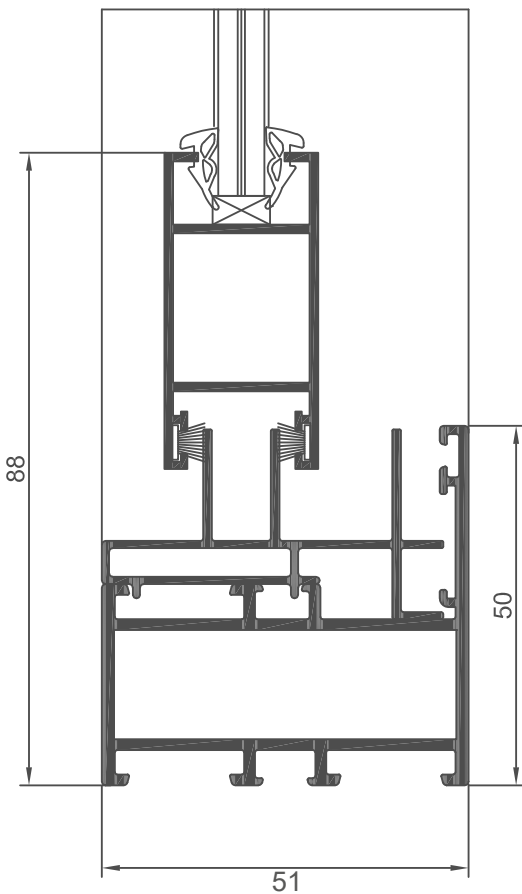

Ecoslide with adaptation profile in Econoline casement
(EL010 + EL015 + ES03)

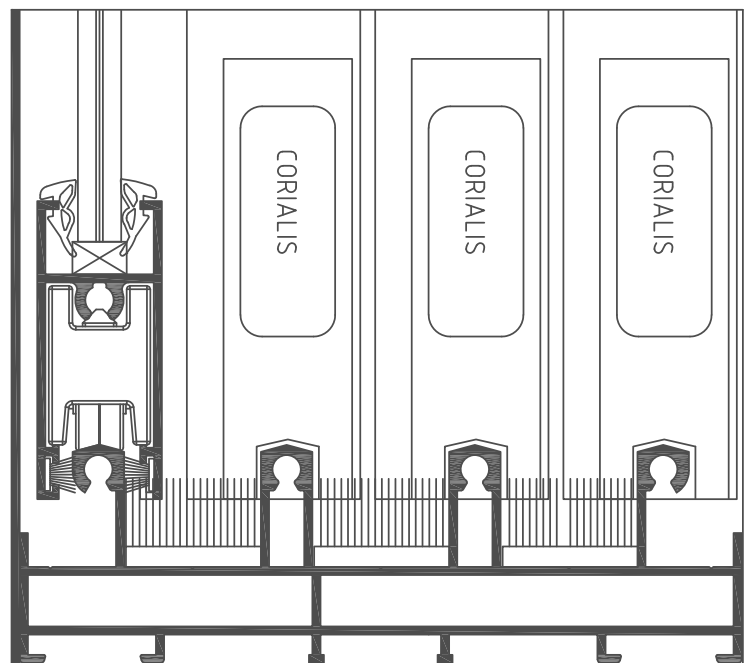

Ecoslide – cross section (ES04 + ES14)